

EuroMaster All Terrain Step Platform FPE-AT 0.6

Technical Data Sheet

PROPERTIES

☑ Standards	BS EN 131-7:2013 / AS/NZS 1892.3 / ANSI A 14.5-2000
⚠ Load Rating	150kg
⚡ Electrical Properties	Complies to AS/NZS 1892.3 Section 2.4
🔥 Heat Resistance	130 Degrees Celsius
🧴 Chemical Resistance	Tested to AS/NZS 1892.3
☁ Accelerated Weathering Test	Tested to AS 2331.3.1
🛠 Warranty	3 years from date of manufacturing


MEASUREMENTS

🏋️ Weight	19kg
📏 Distance Between Rungs	0.300m
📏 Open Height	1.53m
📏 Closed Height	1.71m
📏 Platform Height	0.57m
📏 Handrail Height	0.96m above platform
📏 Closed Width	0.22m
📏 Width with Stabilisers	1.37m
📏 Number of Steps	2 including platform

COMPONENTS

A Stiles	Fibreglass: ISO-PE resin with e-glass fibres
B Rungs	Round: Alloy 6060 / Mg 0.35-0.6 / Ti 0.10%
C Feet	Thermoplastic Polyurethane
D Platform Deck	Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0%
E Platform Hooks	Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15%
F Handrail	Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0%
G Brackets	Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15%
H Rods and Struts	Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0%
I Spacer	Polyethylene
J Step Plates	Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0%
K Rear Step	Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0%
Rivets	Zinc Plated Low Carbon Steel
Nuts	Plated Mild Steel with gold passivate
Washers	Plated Mild Steel with gold passivate

Product Code	FPE-AT 0.6
Manufacturer's Name	Branach Manufacturing Pty Ltd
Phone Number	+613 9761 6633
Certified By (Name, Title)	Pat Driscoll Business Development Manager
Last Updated	5/11/2015

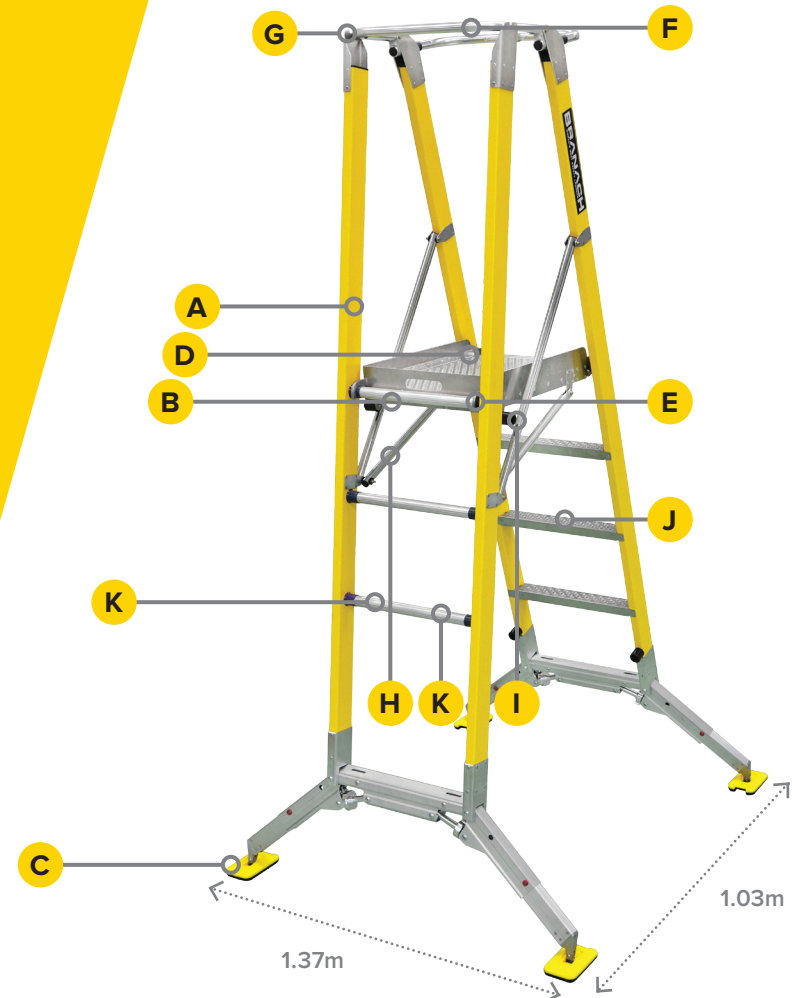

PLEASE NOTE IMAGE IS OF FPE-AT 1.4