

EuroMaster Standard Step Platform FPE-ST 1.7

Technical Data Sheet

PROPERTIES

| | |
|-------------------------------|---|
| ☑ Standards | BS EN 131-7:2013 / AS/NZS 1892.3 / ANSI A 14.5-2000 |
| ⚠ Load Rating | 150kg |
| ⚡ Electrical Properties | Complies to AS/NZS 1892.3 Section 2.4 |
| 🔥 Heat Resistance | 130 Degrees Celsius |
| 🧴 Chemical Resistance | Tested to AS/NZS 1892.3 |
| ☁ Accelerated Weathering Test | Tested to AS 2331.3.1 |
| 🛠 Warranty | 3 years from date of manufacturing |


MEASUREMENTS

| | |
|--------------------------|----------------------|
| 📊 Weight | 21.4kg |
| 📏 Distance Between Rungs | 0.300m |
| 📏 Open Height | 2.68m |
| 📏 Closed Height | 2.91m |
| 📏 Platform Height | 1.72m |
| 📏 Handrail Height | 0.96m above platform |
| 📏 Closed Width | 0.22m |
| 📏 Width with Stabilisers | 1.14m |
| 📏 Number of Steps | 6 including platform |

COMPONENTS

| | |
|-------------------|--|
| A Stiles | Fibreglass: ISO-PE resin with e-glass fibres |
| B Rungs | Round: Alloy 6060 / Mg 0.35-0.6 / Ti 0.10% |
| C Feet | Thermoplastic Polyurethane |
| D Platform Deck | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| E Platform Hooks | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| F Handrail | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| G Brackets | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| H Rods and Struts | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| I Spacer | Polyethylene |
| J Step Plates | NA |
| K Rear Step | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| Rivets | Zinc Plated Low Carbon Steel |
| Nuts | Plated Mild Steel with gold passivate |
| Washers | Plated Mild Steel with gold passivate |

| | |
|----------------------------|--|
| Product Code | FPE-ST 1.7 |
| Manufacturer's Name | Branach Manufacturing Pty Ltd |
| Phone Number | +613 9761 6633 |
| Certified By (Name, Title) | Pat Driscoll Business Development Manager |
| Last Updated | 2/12/2016 |

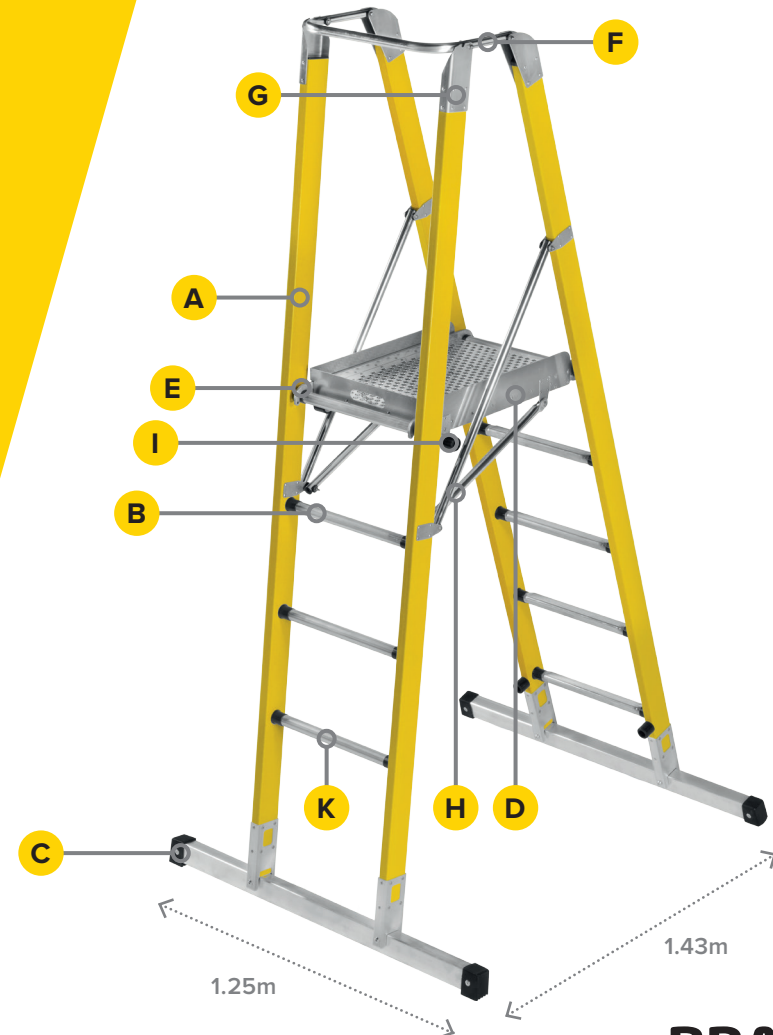

PLEASE NOTE IMAGE IS OF FPE-ST 1.4